


### Flange design

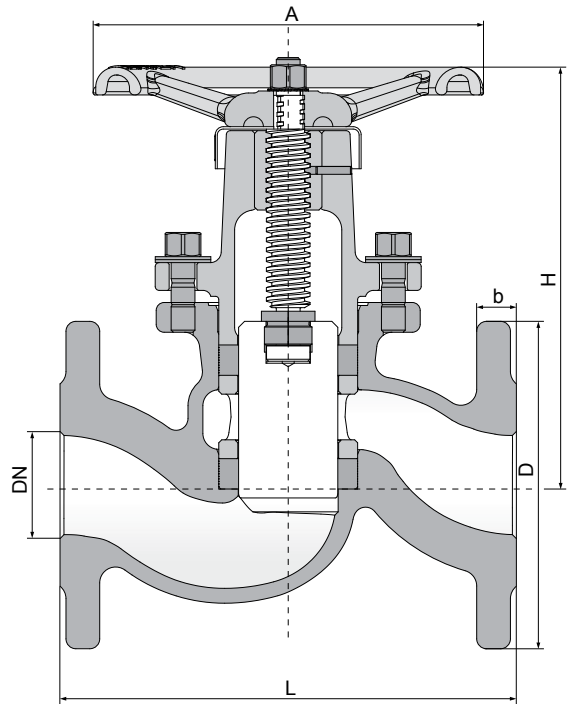

### GENERAL FEATURES

- » Straight-through piston valve
- » Sealing via two elastic KX-GT valve rings
- » Excellent control characteristics
- » Fire Safe
- » Special regulating design available (KVRKN)

### CONNECTIONS

Flange in accordance with EN 1092-2 (Mat. code III, VI)  
 Flange in accordance with EN 1092-1 (Mat. code VIII, Xc)

### ACCEPTANCE TESTING

- » Seat leak tightness: EN 12266-1 P12, leakage rate A
- » Tightness to atmosphere: EN 12266-1 P11
- » Strength: EN 12266-1 P10

### KVN FLANGE DESIGN DN 15-50

#### MATERIAL

- » Grey Cast Iron EN-GJL-250 / 5.1301 (Material code III)
- » Nodular Cast Iron JS 1049 / 5.3103 (Material code VI)\*
- » Cast Steel 1.0619 (Material code VIII)
- » Stainless Steel 1.4581 (Material code Xc)

\* refers to body, upper parts consist of VIII

#### DIMENSIONS

EN 558-1, GR. 1

#### TEMPERATUREE

-10 °C to +400 °C (see P-T diagram)

DN	Dimensions							PN				Weight in kg	
	L	H	A	D	b PN 16	b PN 40	Hub	III	VI	VIII	Xc	PN 16	PN 40
15	130	105	100	95	14	16	23	16	40	40	40	2.8	2.7
20	150	122	120	105	16	18	28	16	40	40	40	4.1	4.4
25	160	140	140	115	16	18	34	16	40	40	40	5.8	6
32	180	157	160	140	18	18	38	16	40	40	40	8.5	9
40	200	184	180	150	18	18	45	16	40	40	40	11.2	11.4
50	230	211	200	165	20	20	51	16	40	40	40	15.8	16.6

\*last updated 10/18