

PRESSURE REDUCING VALVE

Type 7BIS



The Desbordes pressure reducing valves 7 BIS bodies are made of bronze. Due to the design, they are not affected by scale or dirt and do not need any maintenance. They can be fitted on compressed air, neutral gases and fuel oil at ambient temperature circuits. For these cases of applications consult us.

- Control and maintain the downstream pressure at an adjustable reduced value, whether there is a flow or not
- Keep an outlet pressure at a constant value, even by variation of the upstream pressure (the downstream pressure can not vary more than 10 % of the variation of the upstream pressure, according to the Standard)
- Guarantee a high flow rate at a constant outlet pressure because of low headloss
- Downstream setting : 1 bar to 5,5 bar ; indicative value according to EN1567
- Pre-set at 3 bar
- Equipped with 2 plugs 1/4" on each side to allow the mounting of downstream pressure gauge and drain

Technical description

Operating temperature

Mini. : -10 °C / Maxi. in permanent service : 80 °C

Permissible operating pressure (PFA) in water : See table above

Maximum permissible pressure (PS) other mediums : See table above

Connection : Female/female, BSP

Gauge connection 1/4"

Mediums

EPDM : water


Other mediums : consult us

DN "	mm	PFA in bar	PS in bar				Cat.	Ref.		Weight Kg
			L1	L2	G1	G2		Water	Other mediums	
1/2	15	16	16	16	x	16	4.3	149B7209	149B7756	0,50
3/4	20	16	16	16	x	16	4.3	149B7210	149B7757	0,60
1	25	16	16	16	x	16	4.3	149B7552	149B7758	0,95
1 1/4	32	16	16	16	x	16	4.3	149B7553	149B7759	1,55
1 1/2	40	16	16	16	x	16	4.3	149B7554	149B7760	2,05
2	50	16	16	16	x	16	4.3	149B7555	149B7761	3,70

Important notice : L1, L2, G1 and G2 correspond to liquids/gas classified into degree of danger according to the Pressure Equipment Directive (PED). The article 4.3 applies to equipments with no CE marking.

Nomenclature and materials

N°	Designation	Materials	EURO	ANSI
1	Body	Bronze	EN1982 CuSn5Zn5Pb5-C GS	ASTM B 505
2	Stem	DZR Brass	EN12164 CuZn36Pb2As R350	
3	Seal box	Brass	EN12164 CuZn39Pb3 R360 mini	ASTM B 124
4	Seal	DN 15-20 mm	EPDM or NBR	
		DN 25-50 mm	NBR	
5	Membrane	Water	EPDM	
		Other mediums	FKM	
6	Membrane washer	Brass	EN12164 CuZn39Pb3 R360 mini	ASTM B 124
7	Nut	Stainless steels	EN10088-3 X5CrNi 18-10	AISI 304
8	Spring	Anticorrosive steel	EN10270-1 SH	
9	Cap	Brass	EN12165 CuZn40Pb2 H080	ASTM B 124
		or Zamak	Zamak ZP5	
10	Screw	Stainless steel	EN10088-3 X5CrNi 18-10	AISI 304
11	Adjusting screw	Brass	EN12164 CuZn39Pb3 R360 mini	ASTM B 124
12	Plug cap	Brass	EN12164 CuZn39Pb3 R360 mini	ASTM B 124
13	Flat seal	NBR (Nitrile)		
14	Pressure gauge plug	Brass	EN12164 CW617N R360 mini	ASTM B 124
15	O-ring	EPDM or NBR		
16	Plug	Plastic	PB 180 G2M	
		or Brass	CuZn40Pb2	
17*	O-ring	EPDM or NBR		

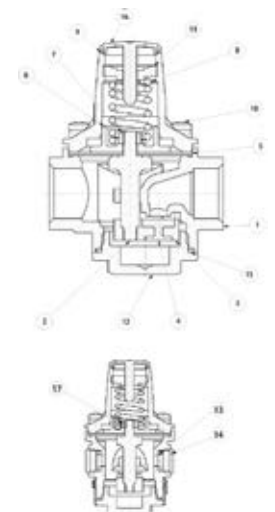

*To DN 32 at 50mm only

PRESSURE REDUCING VALVE

Type 7BIS



Desbordes

Application

7 BIS is an ideal pressure reducing valve for domestic water systems without special requirements : individual supply for building sites (flats, houses...).

Factory preset at 3 bar, it protects the whole installation, facilitates the setting of mixing valves, and decreases the hammering and helps to avoid cracks and vibrations in the piping.

Thanks to its weak head losses, it helps to obtain normal flow during simultaneous pumping.

Installation

In domestic water supply the DESBORDES 7 BIS reducing valves are fitted just after the water meter and thus protect the whole installation. They can be fitted wherever a reducing pressure is needed.

If there is a frost risk, they should be drained.

It can be fitted in any positions (horizontal, upright, upside down, fluid ascending or reversed and inclined...) if you respect the direction of flow as indicated by the arrow engraved on the body. However if the circuit present a risk of back pressure or hammering we recommend to protect the pressure reducing valve with a check valve directly after its output.

Fonctionnement

Flow :

During water flow, water pressure exercised on the diaphragm decreases, which allows the spring to relax. The piston disc-yoke assembly moves towards the bottom to allow the water to pass.

Flow stoppage :

When water flow stops, the downstream pressure pushes on the diaphragm again, the spring goes back to its initial position, which leads to the valve closing, stopping water from flowing freely.

Setting

The adjustment must be done without flow ie no downstream outflow.

The 7 BIS pressure reducing valve is factory pre-set at 3 bar.


They remain adjustable within a 1,5 bar to 5.5 bar range.

To increase the pressure, tighten the adjusting screw (clockwise as you look at the screw from above). To reduce the pressure, undo the adjusting screw (anticlockwise as you look at the screw from above), slightly open a tap for a moment, close again, then tighten the screw again until you obtain a desired pressure. Water hammers can damage the reducing valve.

When commissioning, open slowly and gradually the valve at the upstream side. A booster unit with a sudden start close to the pressure reducer requires the safety of an absorption tank. Just like by any intervention on the pipe work, the circuits must be rinsed beforehand.

Max. upstream pressure : 16 bar.

Operation

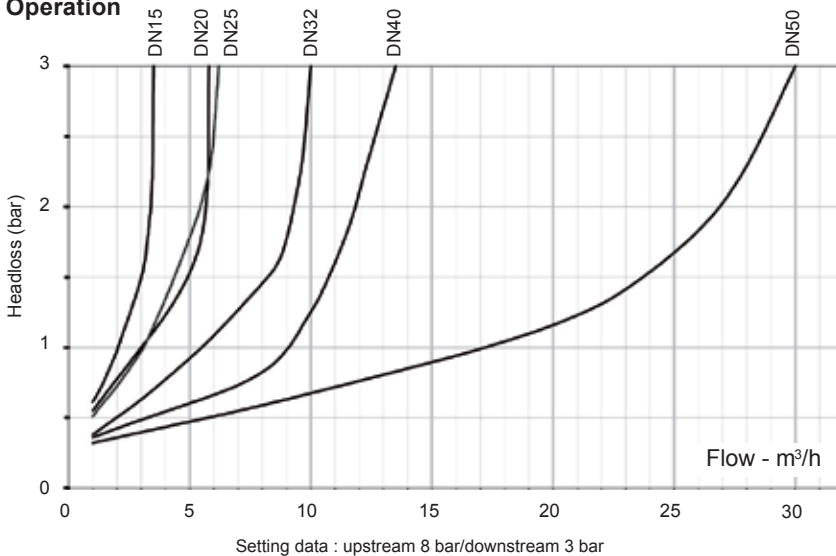


DN (mm)	Kv	Q max	Q at 2 m/s
15	2	3,5	1,27
20	3	5,8	2,26
25	3,1	6,2	3,53
32	5,5	10	5,8
40	9,3	13,5	9
50	17,4	30	14

Kv : Flow in m³/h when the output pressure becomes 1 bar lower than its zero flow setting

7 BIS - Headloss chart

Sizing

DN	D		A	B	C	G
mm	"	mm	mm	mm	mm	mm
15	1/2	15/21	30	56	64,5	50
20	3/4	20/27	33,5	61	70	57
25	1	26/34	30	68	81	70
32	1 1/4	33/42	34,5	91	97	81
40	1 1/2	40/49	36,5	106	110	92
50	2	50/60	45,5	106	135	120



7 BIS

