

NON-RETURN VALVE WITH SINGLE PLATE

Type 635V - 635E / Type 627V - 627E



635V - 635E


DN 40 to 300 mm Between flange
PN 10-16
Extra-flat valve for water distribution & irrigation
• 635V body & plate in zinc plated steel ; seal in FKM on seat ; temperature 150°C
• 635E with seal in EPDM on seat ; temperature 110°C
• 696V body & plate in aluminium copper ; seal in FKM on seat ; temperature 150°C for sea water salted & aggressive solutions, general industrial circuits



627V - 627E FOR GENERAL AND INDUSTRIAL CIRCUITS

DN 40 to 300 mm Between flange
PN 10-16
Extra-flat valve for water distribution & irrigation, hydrocarbons, industrial processes

627V body & plate in 316 stainless steel seal in FKM on seat ; temperature 150°C
Connection:
• DN 40 to DN 150 Wafer Type Between Flange PN10/16
• DN 200 to DN 300 Wafer Type Between Flange PN10
635E with seal in EPDM on seat ; temperature 110°C

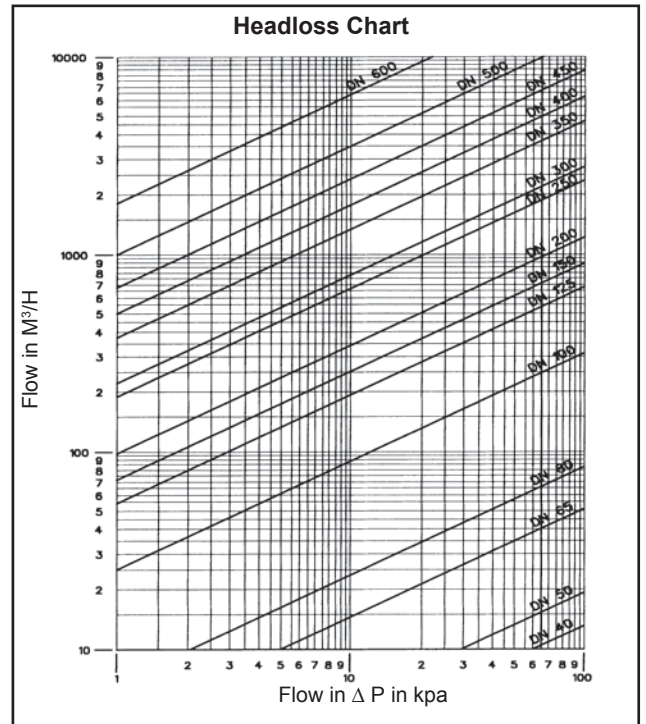

The Single Plate System Range

| Type | Material | Seal | Size |
|-------|-------------------|-----------|--------------|
| 635 V | ZINC-Plated Steel | FKM Seal | 40 to 300 mm |
| 635 E | ZINC-Plated Steel | EDPM Seal | 40 to 300 mm |
| 627 V | Stainless Steel | FKM Seal | 40 to 300 mm |
| 627 E | Stainless Steel | EDPM Seal | 40 to 300 mm |

05 SYSTEM with single plate (between flanges)



INDUSTRY

IRRIGATION


DISTRIBUTION

- Space-saving
- Simple and reliable
- Competitive price

This range of valves is the obvious choice where simplicity and low cost are the priorities

Compact

Seal incorporated in casing

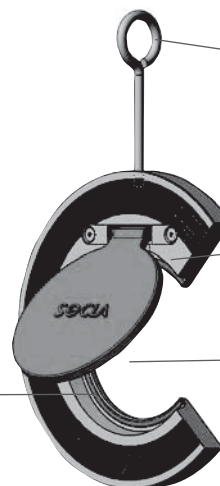

Lifting ring

Stainless steel axis, fixed by screws

Hinged, zinc-coated steel plate



Installed horizontally or vertically facing upwards