


## One-piece heating jacket PN25

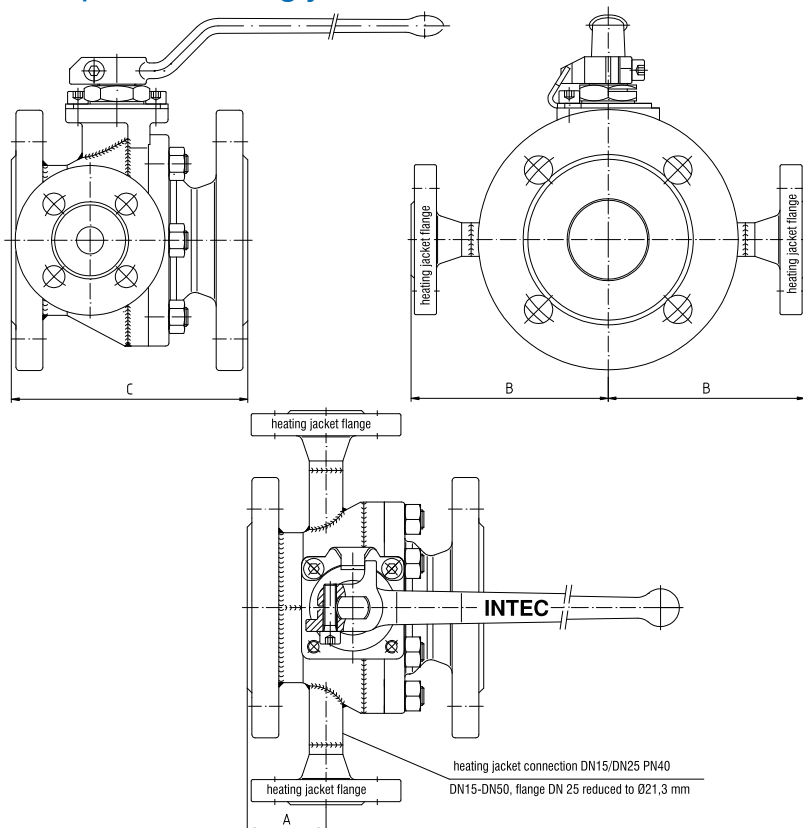

Heating jacket with  
flanges acc. to EN 1092  
Face to face acc. to EN 558, GR.1  
Face to face acc. to EN 558, GR.27

### Dimensions


| DN     | dimensions (mm) |     | GR.1<br>C | GR.27<br>C |
|--------|-----------------|-----|-----------|------------|
|        | A               | B   |           |            |
| 15*    | 70              | 110 | 130       | --         |
| 15     | 38              | 80  | 130       | --         |
| 25 **  | 50              | 110 | 160       | --         |
| 25 *** | 70              | 110 | 160       | --         |
| 40     | 60              | 115 | 200       | 140        |
| 50     | 60              | 125 | 230       | 150        |
| 65     | 55              | 150 | 290       | 170        |
| 80     | 80              | 150 | 310       | 180        |
| 100    | 70              | 160 | 350       | 190        |
| 150    | 90              | 195 | 480       | 350        |
| 200    | 90              | 350 | 600       | 400        |

\* solid material construction

\*\* body material 1.4408

\*\*\* body material 1.4571, 1.4462

## Two-piece heating jacket PN25

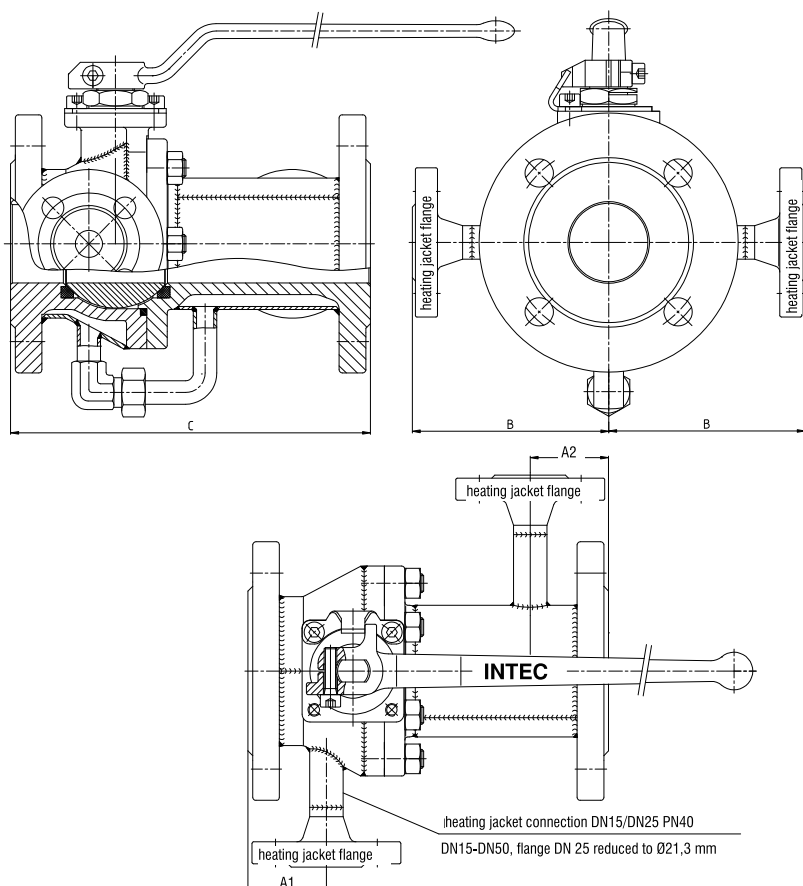

Heating jacket with  
flanges acc. to EN 1092  
Face to face acc. to EN 558, GR.1  
Face to face acc. to EN 558, GR.27

### Dimensions

| DN  | dimensions (mm) |     | GR.1<br>C | GR.27<br>C |
|-----|-----------------|-----|-----------|------------|
|     | A1 / A2         | B   |           |            |
| 15  | 45 / 33         | 80  | 130       | --         |
| 25  | 50 / 45         | 110 | 160       | --         |
| 40  | 60 / 50         | 115 | 200       | --         |
| 50  | 60 / 50         | 125 | 230       | --         |
| 80  | 80 / 70         | 150 | 310       | --         |
| 100 | 70              | 160 | 350       | --         |
| 150 | 110 / 90        | 210 | --        | 350        |
| 200 | 140 / 140       | 265 | --        | 400        |
| 300 | 110 / 70        | 350 | --        | 500        |

